



HUNTER®

MARINE CORPORATION  
AN EMPLOYEE OWNERSHIP COMPANY

## INSTALLATION OF SHEAR PIN FOR H240, 260, 270

### MATERIALS:

DRILL

3/8" BIT




8" CHAIN & RING

3-3/4" x 3/8" DELRON COTTER PIN

#10 X 3/4" ROUND HEAD MACHINE SCREW

*NOTE: THIS INSTALLATION MUST BE PERFORMED IN A LOCATION WHERE THE RUDDER CAN BE FULLY EXTENDED IN THE DOWN POSITION.*

1. RUDDER IN TRAILERING INDICATED BY HOLE IN RUDDER CHEEK
2. ATTACH CHAIN FOR DELRON PIN TO RUDDER POST PLATFORM NEXT TO LOCATION OF TRAILERING PIN. AT ANY GIVEN TIME ONE PIN WILL BE IN USE AND ONE WILL BE STORED IN THE HOLE POSITION
3. LOWER RUDDER INTO FULLY EXTENDED DOWN POSITION
4. DRILL THROUGH RUDDER IN POSITION CATED NEXT TO THE RUDDER POST.

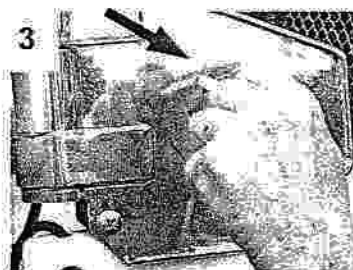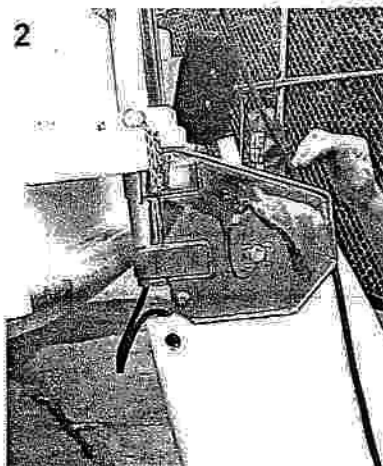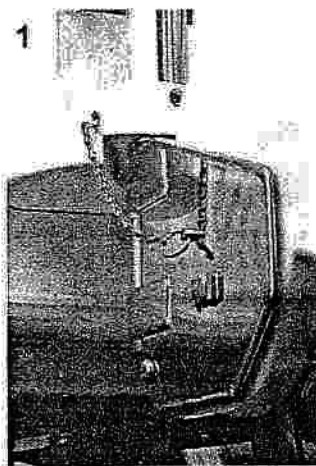

WE GO THE DISTANCE

POST OFFICE BOX 1030 • ROUTE 441 • ALACHUA, FLORIDA USA 32615 • PHONE: (904) 462-3077 • FAX: (904) 462-4077

[www.huntermarine.com](http://www.huntermarine.com) • Email: [huntermarine@att.net](mailto:huntermarine@att.net)