


356 SOP STERN RAIL LIGHT PORT INSTALLATION

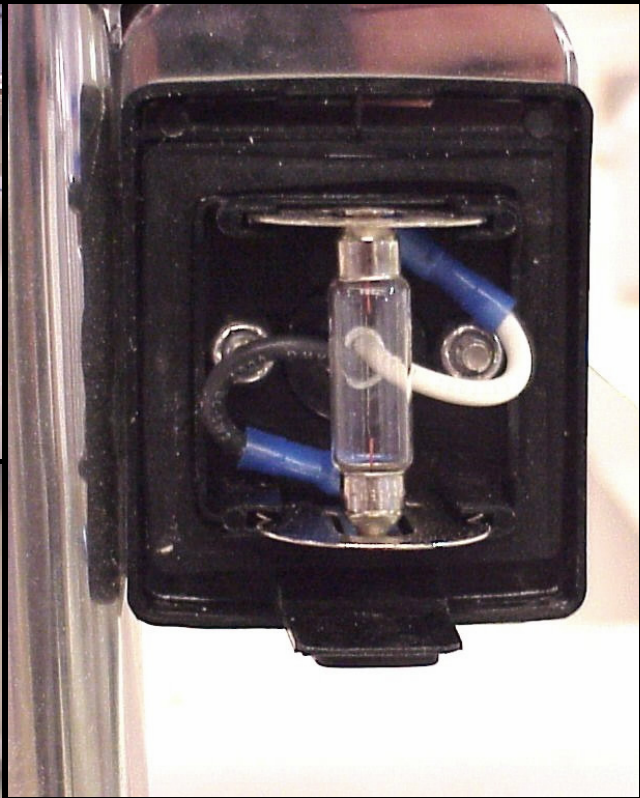

#	Qty.	Description	Size	Part #
1	1	Stern Light Wire (White & Black)	Duplex	659804
2	1	Stern Light	N/A	255878
3	2	Stern Light Fasteners	10-24 x 1/2" P/H	467330
4	2	Lock Nut	10-24	465210
5	2	Slip-On (Blue)	PC-1614-FF	257786

1. The bow light will be attached to the mounting plate located on the aft-inboard side of the starboard bowrail using two 10-24 X 1/2" panhead screws and locknuts. The screw heads will go to the outside (forward side) of the mounting plate and the locknuts will be inside the bow light.
2. Run the duplex wire thru the center hole in the bow light. Strip back the outer sheathing back about 3" then strip the individual wires back 5/8" and attach blue slip-on (spade) connectors.
3. Attach the neutral (black) wire to the bottom connector on the light.
4. Attach the power (white) wire to the top connector on the light.
5. Install the light bulb.
6. Snap the light cover in place.

Revision Dates:

Expected Time: 10 min.