



45DS Deck Rigging Stage Optional Washer-dryer thru Deck Installation (8-16-07)

1. There are 2 cockpit scupper drain thru deck fittings in cockpit floor and their scupper drain thru deck fittings mounted on transom face.
2. There are embossments for both scupper thru deck fitting on cockpit floor aft outboard corners. Drill $\text{\textcircled{2-3/8}}$ thru deck holes on embossments.
3. On transom face, both scupper drain thru deck fittings, locate 11" outboard from swim ladder embossment and 10-1/2" down swim platform. Drill $\text{\textcircled{2-3/8}}$ thru deck holes on the locations.
4. All scupper thru deck fitting installation require all standard thru hull fitting installation procedures.
5. Clean up excess caulk

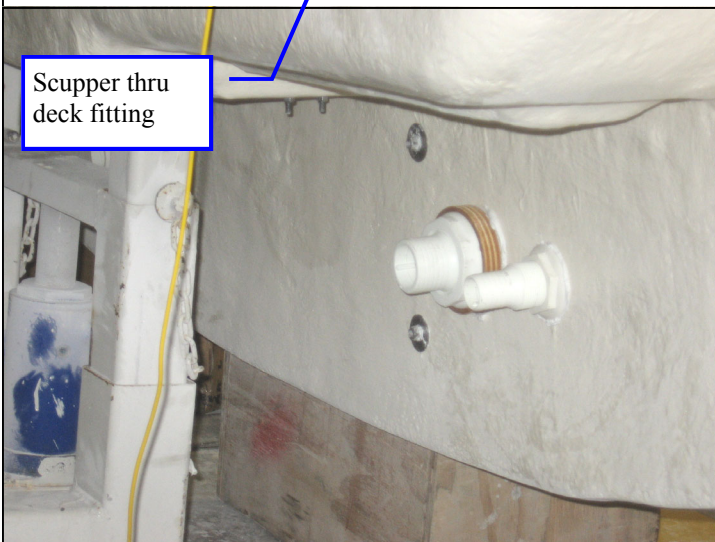

45DS Engine Stage Optional Washer-dryer Installation (8-16-07)

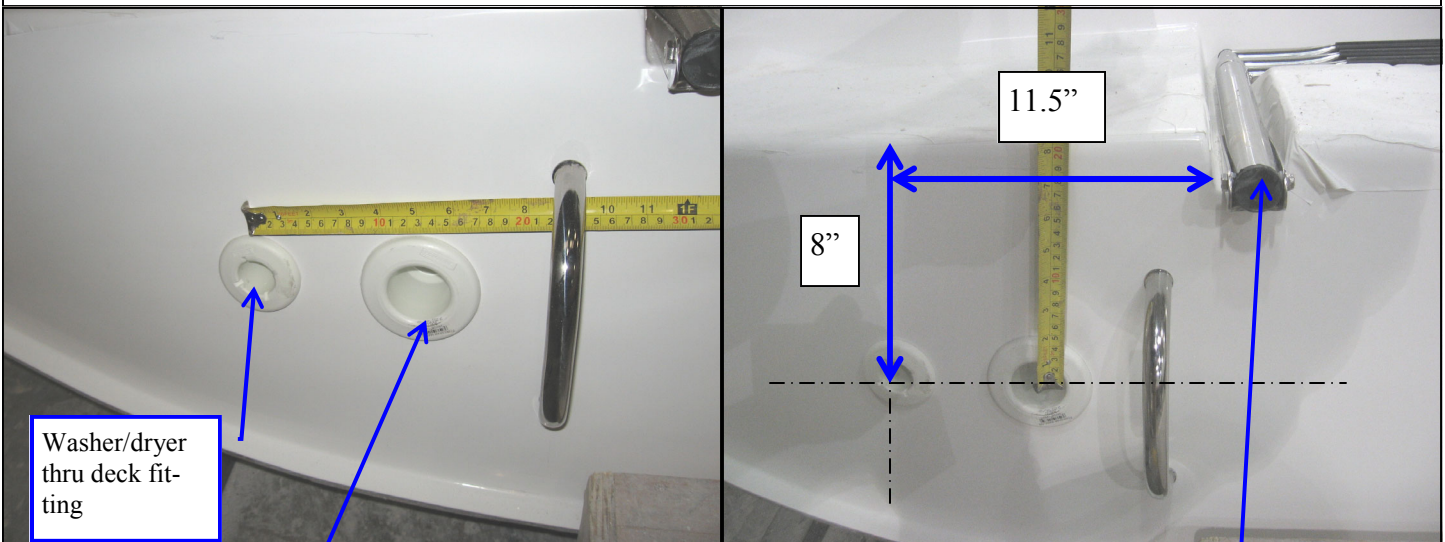