

45CC Floor Grate Remove & Install



1. Fold the plexi-door



2. Close the plexi-door




3. use finger to pick up the grate through center hole of the grate.



4. Swing and lift the floor grate (Do not damage gel coat or parts during process)



5. Turn the grate diagonal and toward the door

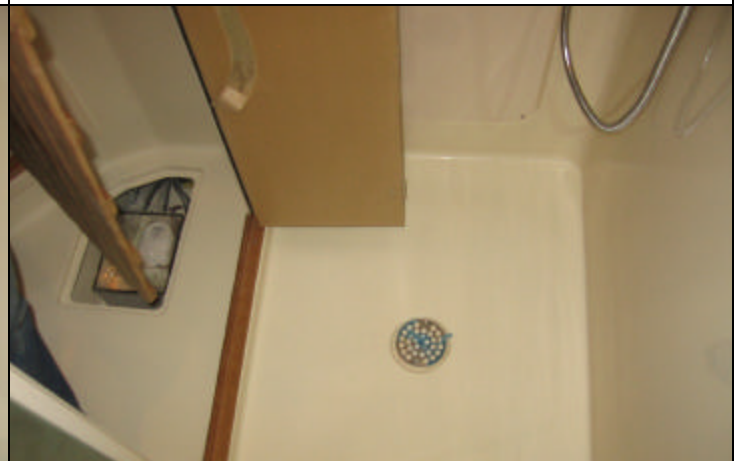

6. The grate is removed from floor. Reverse the process from #1 to #6 to install the grate back to floor.