HUNTER 140



DISCOVER THE DIFFERENCE



HUNTER

The unsinkable Hunter 140 is perfect for sail training at clubs, camps and sailing schools. This boat offers great performance with a powerful main and easy to manage jib, but it is also easy to sail, no matter the proficiency level. The durable ACP construction combines thermoformed UV protected plastic with fiberglass mat and injected foam to make a hull that is five times as impact resistant than conventional fiberglass and is unsinkable. All this at a price to fit any budget.

STANDARDS AND OPTIONS

RIGGING

Aluminum Boom Aluminum Mast -One-Piece Anodized Battens and Bag Boom Vang Dacron Running Rigging Jib Mainsail

Stainless Steel Standing Rigging

DECK/HULL/COCKPIT


Centerboard Heavy Duty Rub Rail Kick-Up Rudder Removable Drain Plug Self-Bailing Drain Stainless Steel Bow Eye Tiller Extension Unsinkable Hull

OPTIONS

Aft Mast Carrier Beach Dolly Bow Bumper Mast Float Motor Mount 2.5 HP Outboard Roller Furling Rudder & Tiller Bag 6' Seat Cushions Trailer-Galvanized Trailer Tongue Jack

SPECIFICATIONS

| Length Overall | 14'0" ······ 4.27 m | Dry Weight | 225 lb ··· 102.15 kg |
|--------------------|-----------------------|--------------------------|-----------------------|
| Beam | 5'10" ······ 1.78 m | Towing Weight | 500 lb ····· 227 kg |
| Draft (Board Up) | 6" ····· 0.15 m | Weight (Persons/Gear) | 935 lb · · · · 424 kg |
| Draft (Board Down) | 3'0" ······ 0.92 m | CE Classification | D |
| Mast Height | 21'6" ······ 6.55 m | Maximum Capacity | 3 |
| Sail Area | 102 ft² ····· 9.94 m² | Maximum Power | 2.5 hp ····· 1.86 kw |
| | | | |
| | | | |

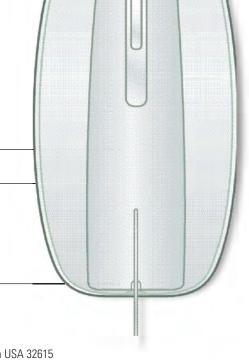

Route 441 Post Office Box 1030 Alachua, Florida USA 32615 Phone (386) 462-3077 , FAX (386) 462-4077 , NATIONAL CUSTOMER HOTLINE U.S. 1-800-771-5556 www.huntermarine.com , e-mail: sales@huntermarine.com , customerservice@huntermarine.com

Hunter Marine reserves the right to modify or change, without notice, any materials, specifications, equipment and/or accessories.All measurements are approximate. Standard equipment may vary for products sold outside the United States









