


356 SOP INVERTER SELECTOR SWITCH WIRING

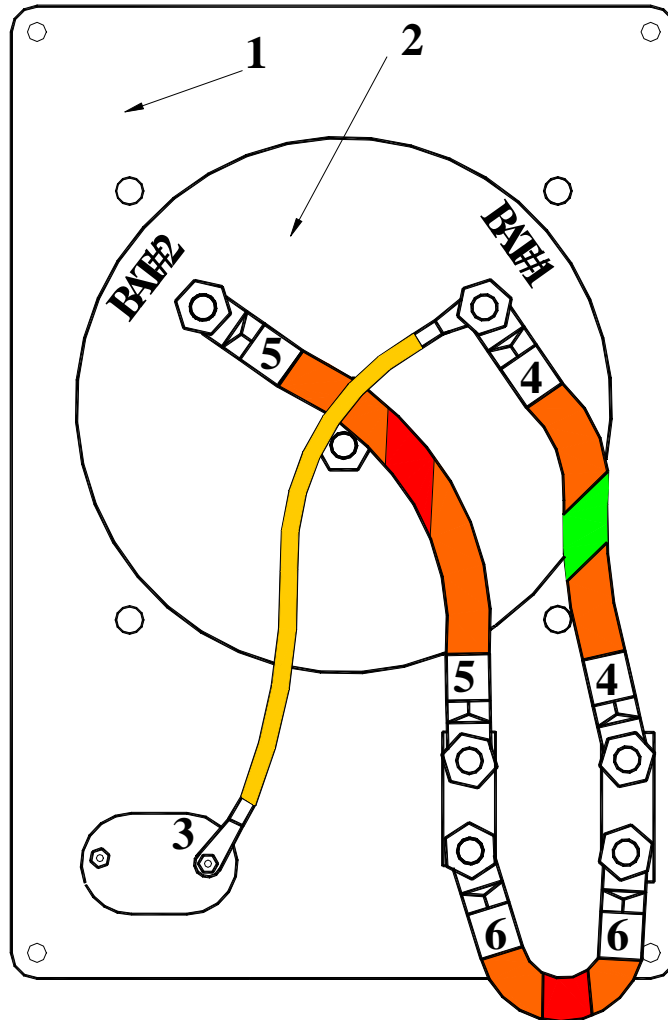

#	#Ea.	Description	Size	Part#	#	#Ea.	Description	Size	Part#
1	1	Inverter Panel	N/A		4	1	Orange/Green (Battery Jumper)	6 Gauge	
2	1	Inverter Selection Switch	N/A		5	1	Orange/Red (Jumper)	6 Gauge	657900
3	1	Tan (Bilge)	12 Gauge	659200	6	1	Orange/Red (Jumper)	6 Gauge	657900

1. Connect the orange/red panel jumper wire (#6) to the lower connectors on the left and right DC switches.
2. Connect the orange/red jumper battery wire (#5) to the top connector on the right DC switch and the other end to the battery 2 post.
3. Connect the orange/green jumper battery wire (#4) to the top connector on the right DC switch and the other end to the battery 1 post.
4. Connect the tan jumper wire (#3, 5" long) to the right connector on the bilge pump reset switch and the battery 1 post.
5. Tighten all connections well.

Revision Dates: 02/22/02

Expected Time: