


356 SOP 110 VOLT SHORE POWER INSTALLATION



LOCATION OF SHORE POWER OUTLET
AND OPTION SECOND OUTLET

BOAT WITH STANDARD 110 VOLT OUTLET

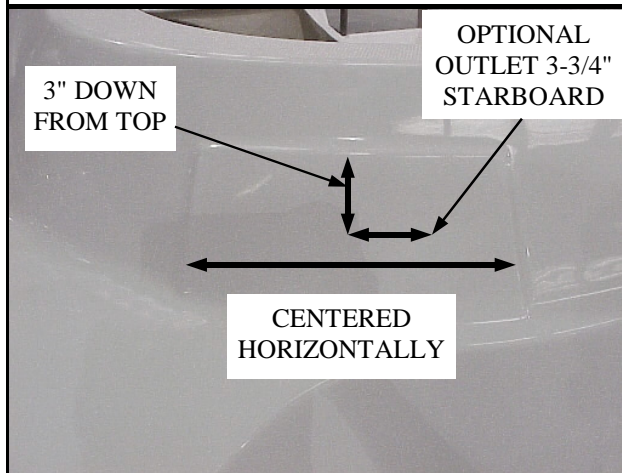

BOAT WITH STANDARD 110 VOLT OUTLET AND
OPTION SECOND OUTLET (IF BOAT HAS AIR
CONDITIONING AND/OR GENERATOR)

#	Qty.	Description	Size	Part #
1	1 or 2	Shore Power Outlet Plug-in	#303SSEL-B	331700
2	4 or 8	Shore Power Outlet Fasteners	#8 x 3/4" F/H	461010

1. The shore power outlet embossment is located on the port-aft corner of the deck. Mark a spot 3" down from the top of the embossment and centered horizontally. If the boat has the air conditioning or generator option then a second shore power outlet will need to be installed, mark a spot 3-3/4" starboard of the first mark and install a second outlet here.
2. Drill the marked location using a 2 7/8" hole saw.
3. Place the shore power outlet into the hole (the hinge goes up) then mark the mounting hole locations.
4. Remove shore power outlet and drill the marked locations using a 9/64" drill bit.
5. Place the shore power outlet in position with the gasket in place then secure it to the deck using #8 x 3/4" flat-head screws. These screws do not need to be tighten well as the outlet will be removed after the boat is decked so the it can be wired.
6. Place the label that comes with the shore power outlet to the portside of the outlet.

Revision Dates:

Expected Time: 20 min.